




Infra red heater

- Infra red heater comprising of a lamp fitted into an E27 lampholder with protective shield and built in reflector, carried on a tube
- Tube can be mounted at any angle, except when the lamp faces upwards, using a bosshead
- Dimensions (l x dia.), mm: 200 x 12.5
- Electrical supply: 230V, 50/60Hz
- Supplied without stand and bosshead

Catalogue No	Description
HCT-601-020B	Heater
HCT-615-040K	Spare lamp, pack of 2

Xcube heating well

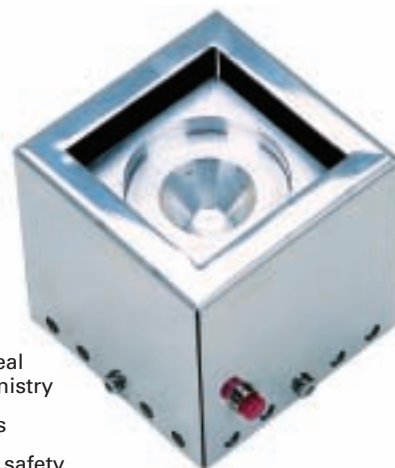

- Small aluminium heating well for educational use, ideal for microscale chemistry
- Rapid heat up times
- Power indicator for safety
- No naked flame heating
- Designed to accommodate sand media
- Easy to clean case
- Maximum temperature, °C: 240
- Rating, W: 25
- Dimensions (w x d x h), mm: 70 x 70 x 70
- Electrical supply: 240V, 50Hz

Catalogue No
HCT-650-010V

Heating mantles, built-in controllers

Fisherbrand®

- Metal cased heating mantles with a unique airflow keeping the exterior 'cool-to-the-touch', and a doubled fused and earthed screen
- Heating element cartridges are replaceable
- No external controllers are needed
- A 'Heater On' light indicates when power is being supplied to the heaters while a 'Power-On' light indicates when the power is on
- Maximum element temperature of 450°C

Catalogue No	Flask capacity, mL	Watts
FB68920	50	60
FB68921	100	80
FB68922	250	150
FB68923	500	260
FB68924	1,000	350
FB68925	2,000	450
FB68926	3,000	550
FB68927	5,000	700
FB68928	10,000	1,200
FB68929	20,000	1,800



Heating mantles, EM series

- Accommodates vessels of various capacities
- Polypropylene outer housing
- Solid state controller and spark free
- 'Power on' and 'Heater on' indicators
- Safety earth screen
- Electrical supply: 230V, 50/60Hz

Catalogue No	Max. temp., °C	Flask capacity, mL	Heater power, W	Dimensions (w x d x h), mm
HEA-265-050L	450	100	60	260 x 175 x 127
HEA-265-070F	450	250	150	260 x 175 x 127
HEA-265-090W	450	500	200	310 x 238 x 145
HEA-265-110T	450	1,000	300	310 x 238 x 145
HEA-265-130N	450	2,000	500	400 x 350 x 190
HEA-265-150W	450	3,000	500	400 x 350 x 190
HEA-265-170B†	450	5,000	1 x 300, 1 x 500	400 x 350 x 190

† Switched element.

