


Fisherbrand

page  
549

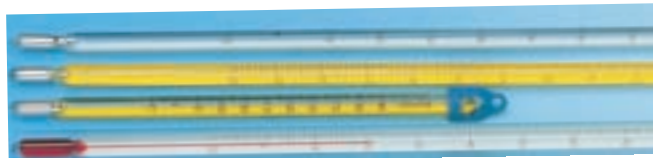

### Thermometers, white backed, mercury filled

- General purpose/stirring thermometers with amber graduations
- Reinforced bulb for stirring
- 76mm immersion
- Non-roll fitting

| Catalogue No | Range, °C   | Subdivisions, °C | Length, mm |
|--------------|-------------|------------------|------------|
| FB68603      | -10 to +110 | 0.5              | 305        |
| FB68605      | -10 to +110 | 1                | 305        |
| FB68609      | -10 to +200 | 1                | 305        |

### Thermometers

- General purpose/stirring thermometers with amber graduations
- Reinforced bulb for stirring
- Total immersion
- Non-roll fitting

#### White backed, red spirit filled

| Catalogue No | Range, °C   | Subdivisions, °C | Length, mm |
|--------------|-------------|------------------|------------|
| FB58541      | -10 to +50  | 0.5              | 305        |
| FB58543      | -20 to +110 | 1                | 305        |
| FB58545      | -20 to +150 | 1                | 305        |
| FB58553      | -10 to +50  | 1                | 155        |
| FB58555      | -10 to +110 | 1                | 155        |

#### Yellow backed, mercury filled

| Catalogue No | Range, °C   | Subdivisions, °C | Length, mm |
|--------------|-------------|------------------|------------|
| FB51412      | -10 to +110 | 1                | 155        |

# tubing

page  
574

### Tubing, natural red rubber

Fisherbrand



- Light and flexible, for transferring liquids, gases and dilute acids, available in normal, medium and heavy wall
- Higher resilience than most other polymers
- Temperature range, °C: -40 to +70
- Not suitable for use with petroleum oils and hydrocarbon solvents
- Supplied in 10m lengths

#### Normal wall, BS 2775: 1987

| Catalogue No | Bore size, mm |
|--------------|---------------|
| FB50703      | 3.0           |
| FB50705      | 5.0           |
| FB50707      | 6.5           |
| FB50709      | 8.0           |

#### Medium wall

|         |     |
|---------|-----|
| FB50733 | 6.3 |
| FB50735 | 8.0 |

# thermometers

page  
550

### Thermometers, white backed, blue spirit filled



- General purpose/stirring thermometers with amber graduations
- Available as total immersion or 76mm immersion
- Low toxic environmentally friendly liquid
- Manufactured to traceable standards
- Non-roll fitting top and suspension ring

| Catalogue No           | Range, °C   | Subdivisions, °C | Length, mm |
|------------------------|-------------|------------------|------------|
| <b>Total immersion</b> |             |                  |            |
| THL-460-050X           | -20 to +110 | 1                | 305        |
| THL-460-110W           | -10 to +110 | 1                | 155        |
| <b>76mm immersion</b>  |             |                  |            |
| THL-460-080F           | -10 to +50  | 0.5              | 305        |
| THL-460-090C           | -20 to +110 | 1                | 305        |